

Electrical sector solutions  
E Line family

# Industry leading design in a compact package



**EATON**


*Powering Business Worldwide*



# EAT•N

Powering Business Worldwide

## The power of fusion.

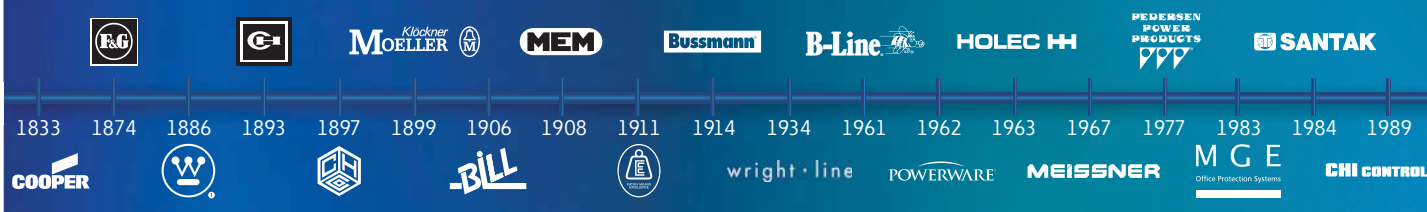

There's a certain energy at Eaton. It's the power of uniting some of the world's most respected names to build a brand you can trust to meet your every power management need.

# EAT•N

Powering Business Worldwide

Eaton is dedicated to ensuring that reliable, efficient and safe power is available when it's needed most. Building on over 100 years of experience in electrical power management, the experts at Eaton deliver customized, integrated solutions to solve your most critical challenges. To learn more visit [www.eaton.com/electrical](http://www.eaton.com/electrical).

All of the above are trademarks of Eaton or its affiliates. Eaton has a license to use the Westinghouse brand name in Asia Pacific. ©2014 Eaton.

### Control relays XTRG



### Control relays XTRG

1

### Contactors XTCCG

2

### Thermal overload relays XTOD/XTOG

3

### Dimensional Data

4

### Contactors XTCCG



### General overview

Eaton's new E Line contactor is powerful, yet compact and is a marvel of innovation incorporating Eaton's vast experience in motor controls. In 1900, Eaton developed the world's first automatic motor starter and over the years, Eaton continued this heritage of innovation launching many industry firsts including the first motor circuit protector and the first microprocessor based contactor. E Line is the world's smallest and most efficient IEC contactor, allowing OEMs and designers to reduce panel size and reduce the impact on the environment.

### Bold new design

When Eaton developed the new E Line contactor family, we wanted to make a bold statement. The E Line is not just another contactor, it's a completely new design incorporating the latest principals of arc-science and technology. By starting fresh, our engineering team was able to focus on the things that matter to our customers while challenging design conventions.

### Quenching the arc

Extinguishing switching arcs during the operation of a contactor or circuit breaker will extend it's life. Through years of research and advanced simulation techniques, Eaton has mastered this science and uses this knowledge to design reliable and innovative products. The E Line's arc-chamber structure is designed to reduce the impact of switching arcs on the power contacts, yielding a more reliable design.

### Thermal overload relays XTOD



### Thermal overload relays XTOG



# E Line motor controls

## System overview

### Designing reliable contactors

To design a reliable contactor, you not only need to study switching arcs, but you need to study contact behavior. Controlling the arc at the time of contact closure and ensuring that it doesn't restrike are all important design considerations. Eaton found that the most reliable contactors have limited contact bounce during actuation and high contact force during operation.

### Controlled actuation


Contact bounce and high mechanical forces are exhibited when a contactor closes. During operation, the contacts crash together and reopen for a fraction of a second. Eaton's engineers have studied this critical point, because it has the most impact on a contactor's life. By reducing contact bounce and reducing the mechanical impact, a designer can extend the life of a contactor without adding additional material or increasing the size. When designing the E Line contactor, our designers focused on limiting contact bounce making it one of the most reliable contactors in the world.

### Innovation reduces time to market

The development team for the E Line family used advanced simulation techniques before a regimen of extensive testing to reduce the time to market. While this helped reduce the engineering time required for this project, the simulation techniques helped Eaton deliver a more robust design with a solid foundation. Our engineers identified problems in the lab rather than the field, so you can be assured of trouble free operation.



High speed video of contact bounce



Arc simulation example

### The ultimate contactor design

A contactor combining high contact force, with low contact bounce is the ultimate design for reliability and efficiency. The first two frames of the E Line contactor line, available today, are the first in a series aimed at doing just that, an optimized balance that combines advanced science, performance and efficiency in a compact package. Discover how E Line can help improve the reliability and efficiency of your machines today.



## Control relays XTRG



<b>1.1 System overview</b>	
Control relays XTRG .....	1
<b>1.2 Product selection</b>	
Basic devices XTRG .....	2
Auxiliary contact modules, Actuating voltages / Accessories .....	3
<b>1.3 Technical data</b>	
Control relays XTRG .....	4

## Control relays XTRG

### Product description

Part of the E Line family of controls, the XTRG control relay offers space savings, enhanced reliability and more efficient use of materials. Rated to operate thermal currents up to 10A, AC voltages up to 660V or DC voltages up to 250V, the XTRG contactor relay offers optimum performance in a compact package.

### Features

- 10A Control relay
- 690V Insulation rating
- 660VAC or 250VDC Operational voltage
- Up to 5 sets of normally open or normally closed contacts with add-on blocks
- All common AC control voltages
- DIN rail or panel mount options
- Unique 27mm design


### System overview

Control relays are used to remotely switch small loads or in complex control schemes. The XTRG relay can be integrated with contactors from the E Line family of motor controls to create compact, efficient control panels for a multitude of applications.

### Standards and certifications


- GB 14048
- IEC/EN 60947
- CCC
- CE

## Accessory overview

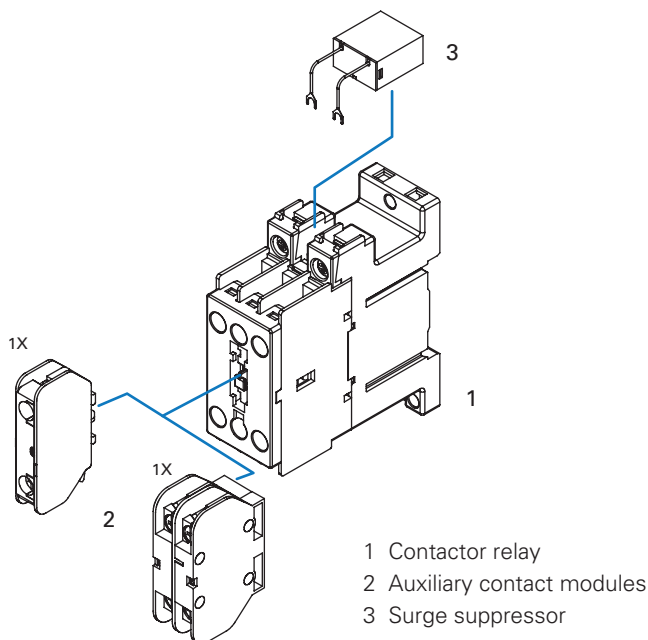

1

XTRG





### Control relays

Connection type	Contact N/O=Normally open N/C=Normally closed	Rated operational current AC-15 I <sub>e</sub> (A)	220V		380 V		Conventional thermal current, open, 40°C I <sub>th</sub> (A)	Circuit symbol	Can be combined with auxiliary contact module	AC operation Part no. Article no.	Standard package
			230V	400 V	240V	415 V					
Screw terminals	3 N/O	-	4	1.9	10			XTCGXFAC10 XTCGXFAC..	<b>XTRG10B30DT</b> 168044	1 piece	
Screw terminals	2 N/O	1 N/C	4	1.9	10			XTCGXFAC10 XTCGXFAC..	<b>XTRG10B21DT</b> 167927	1 piece	
Screw terminals	1 N/O	2 N/C	4	1.9	10			XTCGXFAC10 XTCGXFAC..	<b>XTRG10B12DT</b> 167968	1 piece	
Screw terminals	-	3 N/C	4	1.9	10			XTCGXFAC10 XTCGXFAC..	<b>XTRG10B03DT</b> 167978	1 piece	

### Actuating voltages

Coil Voltage	3NO	2NO/1NC	1NO/2NC	3NC
24VAC 50Hz	<b>XTRG10B30B5</b> 168040	<b>XTRG10B21B5</b> 167923	<b>XTRG10B12B5</b> 167933	<b>XTRG10B03B5</b> 167974
36VAC 50Hz	<b>XTRG10B30DS</b> 168041	<b>XTRG10B21DS</b> 167924	<b>XTRG10B12DS</b> 167934	<b>XTRG10B03DS</b> 167975
48VAC 50Hz	<b>XTRG10B30C5</b> 168042	<b>XTRG10B21C5</b> 167925	<b>XTRG10B12C5</b> 167966	<b>XTRG10B03C5</b> 167976
110VAC 50Hz	<b>XTRG10B30E5</b> 168043	<b>XTRG10B21E5</b> 167926	<b>XTRG10B12E5</b> 167967	<b>XTRG10B03E5</b> 167977
220VAC 50Hz	<b>XTRG10B30DT</b> 168044	<b>XTRG10B21DT</b> 167927	<b>XTRG10B12DT</b> 167968	<b>XTRG10B03DT</b> 167978
380VAC 50Hz	<b>XTRG10B30DU</b> 168047	<b>XTRG10B21DU</b> 167930	<b>XTRG10B12DU</b> 167971	<b>XTRG10B03DU</b> 167936
24V 50/60Hz	<b>XTRG10B30B2</b> 177675	<b>XTRG10B21B2</b> 177687	<b>XTRG10B12B2</b> 177693	<b>XTRG10B03B2</b> 177681
36V 50/60Hz	<b>XTRG10B30DV</b> 177676	<b>XTRG10B21DV</b> 177688	<b>XTRG10B12DV</b> 177694	<b>XTRG10B03DV</b> 177682
48V 50/60Hz	<b>XTRG10B30C2</b> 177677	<b>XTRG10B21C2</b> 177689	<b>XTRG10B12C2</b> 177695	<b>XTRG10B03C2</b> 177683
110V 50/60Hz	<b>XTRG10B30E2</b> 177678	<b>XTRG10B21E2</b> 177690	<b>XTRG10B12E2</b> 177696	<b>XTRG10B03E2</b> 177684
220V 50/60Hz	<b>XTRG10B30AO</b> 177679	<b>XTRG10B21AO</b> 177691	<b>XTRG10B12AO</b> 177697	<b>XTRG10B03AO</b> 177685
380V 50/60Hz	<b>XTRG10B30AR</b> 177680	<b>XTRG10B21AR</b> 177692	<b>XTRG10B12AR</b> 177698	<b>XTRG10B03AR</b> 177686
24V DC	<b>XTRG10B30B0</b> 178153	<b>XTRG10B21B0</b> 178152	<b>XTRG10B12B0</b> 178154	<b>XTRG10B03B0</b> 178151

Auxiliary contact, top mounting



Auxiliary contact modules

Connection type		Conventional thermal current open, 40°C $I_{th} = I_e$ AC-1 A	Contact N/O=Normally open N/C=Normal closed		Circuit symbol	Can be combined with control relay	Part no. Article no.	Standard package
Screw terminals	1 pole	10	1 N/O	-		XTRG10B..	<b>XTCGXFAC10</b> 167939	1 piece
Screw terminals	1 pole	10	-	1 N/C		XTRG10B..	<b>XTCGXFAC01</b> 167940	1 piece
Screw terminals	2 pole	10	2 N/O	-		XTRG10B..	<b>XTCGXFAC20</b> 167941	1 piece
Screw terminals	2 pole	10	1 N/O	1 N/C		XTRG10B..	<b>XTCGXFAC11</b> 167942	1 piece
Screw terminals	2 pole	10	-	2 N/C		XTRG10B..	<b>XTCGXFAC02</b> 167943	1 piece

Coil surge supsressor

Coil voltage	RC	Varistor
24-48V	<b>XTCGXRSCN2</b> 167946	<b>XTCGXVSCN2</b> 167949
110-220V	<b>XTCGXRSCDV</b> 167947	<b>XTCGXVSCDV</b> 167950
380-440V	<b>XTCGXRSCCM</b> 167948	<b>XTCGXVSCCM</b> 167951

# 1.3

## Control relays XTRG

Technical data

1

### General

			XTRG10B..	XTCGXFAC..
Standards			IEC/EN 60947, GB 14048	
<b>Mechanical lifespan</b>				
AC operated	Operations	x 10 <sup>6</sup>	10	10
<b>Maximum operating frequency</b>				
Maximum operating frequency	Operations/h		3600	3600
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30	
<b>Ambient temperature</b>				
Operation		°C	-25-55	-25-55
Storage		°C	-40-80	-40-80
Protection type			IP20	IP20
Weight approximate weight		kg	0.17	0.02

### Contacts

			XTRG10B..	XTCGXFAC..
Rated impulse withstand voltage	U <sub>imp</sub>	VAC	6000	6000
Overvoltage category/degree of pollution			III/3	III/3
Rated insulation voltage	U <sub>i</sub>	VAC	690	690
Rated operational voltage	U <sub>e</sub>	VAC	660	660
Rated operational current				
<b>AC-15</b>				
120V	I <sub>e</sub>	A	6	6
240V	I <sub>e</sub>	A	4	4
380V	I <sub>e</sub>	A	1.9	1.9
480V	I <sub>e</sub>	A	1.5	
500V	I <sub>e</sub>	A	1.4	
600V	I <sub>e</sub>	A	1.2	
<b>DC-13</b>				
125V	I <sub>e</sub>	A	0.55	0.55
250V	I <sub>e</sub>	A	0.27	0.27
Conventional thermal current			I <sub>th</sub>	A
Conventional thermal current			10	10
<b>Electrical lifespan</b>				
at U <sub>e</sub> =230V, AC-15, 3A		Operations	x 10 <sup>6</sup>	1
				1








**Magnet system**



			<b>XTRG10B..</b>
Voltage tolerance	Pick-up	x U <sub>c</sub>	0.85-1.1
Power consumption of coil in a cold state and 1.0 xU <sub>c</sub> (50Hz)	Pick-up	VA	30
	Sealing	VA	6
	Sealing	W	2
	Sealing	W	2
Power consumption of coil in a cold state and 1.0 xU <sub>c</sub> (50/60Hz)	50Hz Pick-up	VA	35
	50Hz Sealing	VA	6.5
	50Hz Sealing	W	2.3
Power consumption of coil in a cold state and 1.0 xU <sub>c</sub> (50/60Hz)	60Hz Pick-up	VA	30
	60Hz Sealing	VA	6
	60Hz Sealing	W	2.1
Power consumption of coil in a cold state and 1.0 xU <sub>c</sub> (24VDC)	Pick-up	VA	12
	Sealing	W	3

**Terminals**

**XTRG10B..**

	 mm <sup>2</sup>	 mm <sup>2</sup>	Nm
	0.75-2.5	0.75-2.5	0.8
	0.75-2.5	0.75-2.5	

**XTCGXFAC..**

A1 / A2 / Aux	mm <sup>2</sup>	Nm
	0.75-2.5	0.8
		

# Contactors XTCG

## Contents

### Contactors XTCG

2



<b>2.1 System overview</b>	
Contactors XTCG .....	6
<b>2.2 Product selection</b>	
Basic devices XTCG .....	7
Auxiliary contact modules .....	7
Accessories .....	8
<b>2.3 Technical data</b>	
Contactors XTCG .....	10
Auxiliary contact modules .....	11

## Contactors XTCG

### Product description

The XTCG is the flagship of the E Line family of motor controls. The XTCG contactor offers space savings, enhanced reliability and more efficient use of materials. Boasting AC-3 ratings up to 95A @ 400V and with a maximum operating voltage of 660V, XTCG offers tremendous performance in a small package.

### Features

- Technologically advanced contact design
- 690V insulation rating
- Operating voltage up to 660VAC
- Up to (3) add on auxiliary contact modules
- All common AC control voltages
- DIN rail or panel mount options
- Unique space saving design

### System overview


3 phase contactors are used to start motors or control industrial loads. The E Line family of contactors allows the starting of motors up to 45kW, and when combined with an XTOD overload relay or PKZC motor protective circuit breaker offers a complete package of protection and control for long life and reliable operation.

### Standards and certifications


- GB 14048
- IEC/EN 60947
- CCC
- CE

## Accessory overview


7-12A Frame

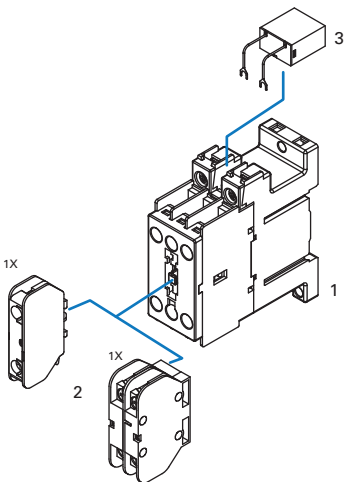


18-38A Frame

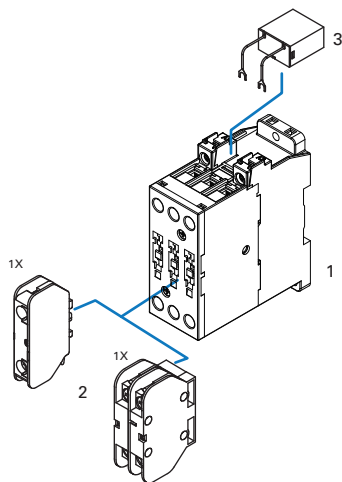

40-95A Frame

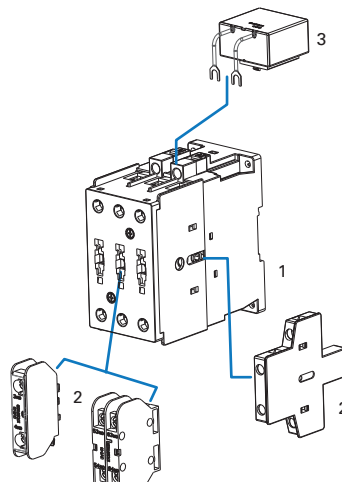

With mechanical interlock



- 1 Contactor relay
- 2 Auxiliary contact modules
- 3 Surge suppressor
- 4 Interlocking kit

XTCG



3-pole contactors


Connection type	Rated operational current AC-3 I <sub>e</sub> (A) 380V	Max motor rating for 3-phase motors, 50-60Hz AC-3 P kW			Conventional thermal current, open, 40 °C I <sub>th</sub> = I <sub>e</sub> AC-1(A)	Circuit symbol	AC operation Part no. Article no. Actuating voltage 220V 50Hz	Standard package
		220V	380V	660V*				
Screw terminals	7	2.2	3	3.5	20		<b>XTCG007B00DT</b> 167984	1 piece
Screw terminals	9	2.5	4	4.5	20		<b>XTCG009B00DT</b> 167994	1 piece
Screw terminals	12	3.5	5.5	5.5	20		<b>XTCG012B00DT</b> 168004	1 piece
Screw terminals	18	5	7.5	7.5	25		<b>XTCG018C00DT</b> 168014	1 piece
Screw terminals	25	7.5	11	11	35		<b>XTCG025C00DT</b> 168024	1 piece
Screw terminals	32	10	15	15	40		<b>XTCG032C00DT</b> 168034	1 piece
Screw terminals	38	11	18.5	22	40		<b>XTCG038C00DT</b> 174459	1 piece
Screw terminals	40	12.5	18.5	22	60		<b>XTCG040D00DT</b> 172214	1 piece
Screw terminals	50	15.5	22	30	70		<b>XTCG050D00DT</b> 172224	1 piece
Screw terminals	65	20	30	37	80		<b>XTCG065D00DT</b> 172234	1 piece
Bolts terminals	80	25	37	37	110		<b>XTCG080E00DT</b> 172244	1 piece
Bolts terminals	95	30	45	45	120		<b>XTCG095E00DT</b> 172254	1 piece

\* 40-95A is 690V.

Auxiliary contact modules

Connection type	Poles	Conventional thermal current open, 40 °C I <sub>th</sub> = I <sub>e</sub> AC-1 A	Contact		Circuit symbol	Can be combined with control relay	Part no. Article no.	Standard package
			N/O=Normally open	N/C=Normal closed				
Screw terminals	1 pole	10	1 N/O	-		XTCG007B00.. XTCG009B00..	<b>XTCGXFAC10</b> 167939	1 piece
	1 pole	10	-	1 N/C		XTCG012B00.. XTCG018C00..	<b>XTCGXFAC01</b> 167940	1 piece
	2 pole	10	2 N/O	-		XTCG025C00.. XTCG032C00..	<b>XTCGXFAC20</b> 167941	1 piece
	2 pole	10	1 N/O	1 N/C		XTCG038C00.. XTCG040D00.. XTCG050D00..	<b>XTCGXFAC11</b> 167942	1 piece
	2 pole	10	-	2 N/C		XTCG065D00.. XTCG080E00.. XTCG095E00..	<b>XTCGXFAC02</b> 167943	1 piece
	2 pole	10	1 N/O	1 N/C		XTCG040D00.. XTCG050D00.. XTCG065D00.. XTCG080E00.. XTCG095E00..	<b>XTCGXSAE11</b> 172260	1 piece

Top mounting



Side mounting



# 2.3

## Contactors XTCG Product selection

### Actuating voltages

2

Coil voltage	7A	9A	12A	18A	25A	32A	38A
24VAC 50Hz	<b>XTCG007B00B5</b> 167980	<b>XTCG009B00B5</b> 167990	<b>XTCG012B00B5</b> 168000	<b>XTCG018C00B5</b> 168010	<b>XTCG025C00B5</b> 168020	<b>XTCG032C00B5</b> 168030	<b>XTCG038C00B5</b> 174455
36VAC 50Hz	<b>XTCG007B00DS</b> 167981	<b>XTCG009B00DS</b> 167991	<b>XTCG012B00DS</b> 168001	<b>XTCG018C00DS</b> 168011	<b>XTCG025C00DS</b> 168021	<b>XTCG032C00DS</b> 168031	<b>XTCG038C00DS</b> 174456
48VAC 50Hz	<b>XTCG007B00C5</b> 167982	<b>XTCG009B00C5</b> 167992	<b>XTCG012B00C5</b> 168002	<b>XTCG018C00C5</b> 168012	<b>XTCG025C00C5</b> 168022	<b>XTCG032C00C5</b> 168032	<b>XTCG038C00C5</b> 174457
110VAC 50Hz	<b>XTCG007B00E5</b> 167983	<b>XTCG009B00E5</b> 167993	<b>XTCG012B00E5</b> 168003	<b>XTCG018C00E5</b> 168013	<b>XTCG025C00E5</b> 168023	<b>XTCG032C00E5</b> 168033	<b>XTCG038C00E5</b> 174458
220VAC 50Hz	<b>XTCG007B00DT</b> 167984	<b>XTCG009B00DT</b> 167994	<b>XTCG012B00DT</b> 168004	<b>XTCG018C00DT</b> 168014	<b>XTCG025C00DT</b> 168024	<b>XTCG032C00DT</b> 168034	<b>XTCG038C00DT</b> 174459
380VAC 50Hz	<b>XTCG007B00DU</b> 167987	<b>XTCG009B00DU</b> 167997	<b>XTCG012B00DU</b> 168007	<b>XTCG018C00DU</b> 168017	<b>XTCG025C00DU</b> 168027	<b>XTCG032C00DU</b> 168037	<b>XTCG038C00DU</b> 174462
24VAC 50/60Hz	<b>XTCG007B00B2</b> 177208	<b>XTCG009B00B2</b> 177214	<b>XTCG012B00B2</b> 177220	<b>XTCG018C00B2</b> 177226	<b>XTCG025C00B2</b> 177232	<b>XTCG032C00B2</b> 177238	<b>XTCG038C00B2</b> 177639
36VAC 50/60Hz	<b>XTCG007B00DV</b> 177242	<b>XTCG009B00DV</b> 177243	<b>XTCG012B00DV</b> 177244	<b>XTCG018C00DV</b> 177245	<b>XTCG025C00DV</b> 177246	<b>XTCG032C00DV</b> 177247	<b>XTCG038C00DV</b> 177640
48VAC 50/60Hz	<b>XTCG007B00C2</b> 177209	<b>XTCG009B00C2</b> 177215	<b>XTCG012B00C2</b> 177221	<b>XTCG018C00C2</b> 177227	<b>XTCG025C00C2</b> 177233	<b>XTCG032C00C2</b> 177192	<b>XTCG038C00C2</b> 177641
110VAC 50/60Hz	<b>XTCG007B00E2</b> 177210	<b>XTCG009B00E2</b> 177216	<b>XTCG012B00E2</b> 177222	<b>XTCG018C00E2</b> 177228	<b>XTCG025C00E2</b> 177234	<b>XTCG032C00E2</b> 177193	<b>XTCG038C00E2</b> 177642
220VAC 50/60Hz	<b>XTCG007B00AO</b> 177205	<b>XTCG009B00AO</b> 177211	<b>XTCG012B00AO</b> 177217	<b>XTCG018C00AO</b> 177223	<b>XTCG025C00AO</b> 177229	<b>XTCG032C00AO</b> 177235	<b>XTCG038C00AO</b> 177643
380VAC 50/60Hz	<b>XTCG007B00AR</b> 177206	<b>XTCG009B00AR</b> 177212	<b>XTCG012B00AR</b> 177218	<b>XTCG018C00AR</b> 177224	<b>XTCG025C00AR</b> 177230	<b>XTCG032C00AR</b> 177236	<b>XTCG038C00AR</b> 177644
24VDC	<b>XTCG007B00B0</b> 177207	<b>XTCG009B00B0</b> 177213	<b>XTCG012B00B0</b> 177219	<b>XTCG018C00B0</b> 177225	<b>XTCG025C00B0</b> 177231	<b>XTCG032C00B0</b> 177237	<b>XTCG038C00B0</b> 177194

40A	50A	65A	80A	95A
<b>XTCG040D00B5</b> 172210	<b>XTCG050D00B5</b> 172220	<b>XTCG065D00B5</b> 172230	<b>XTCG080E00B5</b> 172240	<b>XTCG095E00B5</b> 172250
<b>XTCG040D00DS</b> 172211	<b>XTCG050D00DS</b> 172221	<b>XTCG065D00DS</b> 172231	<b>XTCG080E00DS</b> 172241	<b>XTCG095E00DS</b> 172251
<b>XTCG040D00C5</b> 172212	<b>XTCG050D00C5</b> 172222	<b>XTCG065D00C5</b> 172232	<b>XTCG080E00C5</b> 172242	<b>XTCG095E00C5</b> 172252
<b>XTCG040D00E5</b> 172213	<b>XTCG050D00E5</b> 172223	<b>XTCG065D00E5</b> 172233	<b>XTCG080E00E5</b> 172243	<b>XTCG095E00E5</b> 172253
<b>XTCG040D00DT</b> 172214	<b>XTCG050D00DT</b> 172224	<b>XTCG065D00DT</b> 172234	<b>XTCG080E00DT</b> 172244	<b>XTCG095E00DT</b> 172254
<b>XTCG040D00DU</b> 172217	<b>XTCG050D00DU</b> 172227	<b>XTCG065D00DU</b> 172237	<b>XTCG080E00DU</b> 172247	<b>XTCG095E00DU</b> 172257
<b>XTCG040D00B2</b> 177645	<b>XTCG050D00B2</b> 177651	<b>XTCG065D00B2</b> 177657	<b>XTCG080E00B2</b> 177663	<b>XTCG095E00B2</b> 177669
<b>XTCG040D00DV</b> 177646	<b>XTCG050D00DV</b> 177652	<b>XTCG065D00DV</b> 177658	<b>XTCG080E00DV</b> 177664	<b>XTCG095E00DV</b> 177670
<b>XTCG040D00C2</b> 177647	<b>XTCG050D00C2</b> 177653	<b>XTCG065D00C2</b> 177659	<b>XTCG080E00C2</b> 177665	<b>XTCG095E00C2</b> 177671
<b>XTCG040D00E2</b> 177648	<b>XTCG050D00E2</b> 177654	<b>XTCG065D00E2</b> 177660	<b>XTCG080E00E2</b> 177666	<b>XTCG095E00E2</b> 177672
<b>XTCG040D00AO</b> 177649	<b>XTCG050D00AO</b> 177655	<b>XTCG065D00AO</b> 177661	<b>XTCG080E00AO</b> 177667	<b>XTCG095E00AO</b> 177673
<b>XTCG040D00AR</b> 177650	<b>XTCG050D00AR</b> 177656	<b>XTCG065D00AR</b> 177662	<b>XTCG080E00AR</b> 177668	<b>XTCG095E00AR</b> 177674
<b>XTCG040D00B0</b> 177195	<b>XTCG050D00B0</b> 177196	<b>XTCG065D00B0</b> 177197	<b>XTCG080E00B0</b> 177198	<b>XTCG095E00B0</b> 177199

# 2.3

## Contactors XTCG Technical data

### General

XT Basic device			CG007	CG009	CG012	CG018	CG025	CG032
Standards			IEC/EN 60947, GB 14048					
<b>Lifespan, mechanical</b>								
AC operated	Operations	x 10 <sup>6</sup>	10	10	10	10	10	10
<b>Operating frequency</b>								
AC operated	Operations/h		3600	3600	3600	3600	3600	3600
Climatic Proofing			Damp heat, constant, to IEC60068-2-78 Damp heat, cyclic, to IEC60068-2-30					
<b>Ambient temperature</b>								
Operation		°C	-25-55	-25-55	-25-55	-25-55	-25-55	-25-55
Storage		°C	-40-80	-40-80	-40-80	-40-80	-40-80	-40-80
Protection type			IP20	IP20	IP20	IP20	IP20	IP20
Weight			kg	0.17	0.17	0.17	0.35	0.35
<b>Terminal capacity of main cable</b>								
Solid/stranded		AWG						
Terminal capacity of control circuit cable		mm <sup>2</sup>	0.75-2.5	0.75-2.5	0.75-2.5	0.75-2.5	0.75-2.5	0.75-2.5
Main cable connection screws / bolts			M3.5	M3.5	M3.5	M5	M5	M5
Tightening torque			Nm	0.8	0.8	0.8	2	2
Control circuit cable connection screws			M3.5	M3.5	M3.5	M3.5	M3.5	M3.5
Tightening torque			Nm	0.8	0.8	0.8	0.8	0.8
<b>Main contacts</b>								
Rated impulse withstand voltage		U <sub>imp</sub> V AC	6000	6000	6000	6000	6000	6000
Overvoltage category / pollution degree			III/3	III/3	III/3	III/3	III/3	III/3
Rated insulation voltage		U <sub>i</sub> V AC	690	690	690	690	690	690
Rated operational voltage		U <sub>e</sub> V AC	660	660	660	660	660	660
Making capacity (cos φ to IEC/EN60947)		380V A	70	90	120	180	250	320
<b>Breaking capacity (cos φ to IEC/EN60947)</b>								
		380V A	56	72	96	144	200	256
<b>Electrical lifespan</b>								
AC-3		Op.	1,500,000	1,500,000	1,500,000	1,000,000	1,000,000	1,000,000
AC-4		Op.	100,000	100,000	100,000	100,000	100,000	100,000
<b>Magnet systems</b>								
Voltage tolerance AC operated		Pick-up x U <sub>c</sub>	0.85-1.1	0.85-1.1	0.85-1.1	0.85-1.1	0.85-1.1	0.85-1.1
<b>Power consumption of coil in a cold state and 1.0 xU<sub>c</sub></b>								
Pick-up		VA	30	30	30	80	80	80
Sealing		VA	6	6	6	8.1	8.1	8.1
Sealing		W	2	2	2	2.4	2.4	2.4
<b>Power consumption of coil in a cold state and 1.0 xU<sub>c</sub> ( 50/60Hz )</b>								
50Hz Pick-up		VA	35	35	35	85	85	85
50Hz Sealing		VA	6.5	6.5	6.5	8.5	8.5	8.5
50Hz Sealing		W	2.3	2.3	2.3	2.6	2.6	2.6
<b>Power consumption of coil in a cold state and 1.0 xU<sub>c</sub> ( 50/60Hz )</b>								
60Hz Pick-up		VA	30	30	30	80	80	80
60Hz Sealing		VA	6	6	6	8.1	8.1	8.1
60Hz Sealing		W	2.1	2.1	2.1	2.5	2.5	2.5
<b>Power consumption of coil in a cold state and 1.0 xU<sub>c</sub> ( 24VDC )</b>								
Pick-up		VA	12	12	12	12	12	12
Sealing		W	3	3	3	3	3	3

CG038	CG040	CG050	CG065	CG080	CG095
IEC/EN 60947, GB 14048					
10	5	5	5	5	5
3600	3600	3600	3600	3600	3600
Damp heat, constant, to IEC60068-2-78 Damp heat, cyclic, to IEC60068-2-30					
-25-55	-25-55	-25-55	-25-55	-25-55	-25-55
-40-80	-40-80	-40-80	-40-80	-40-80	-40-80
IP20	IP20	IP20	IP20	IP20	IP20
0.35	0.76	0.76	0.76	1.25	1.25
0.75-2.5	0.75-2.5	0.75-2.5	0.75-2.5	0.75-2.5	0.75-2.5
M5	M6	M6	M6	M8	M8
2	2.5	2.5	2.5	6	6
M3.5	M3.5	M3.5	M3.5	M3.5	M3.5
0.8	0.8	0.8	0.8	0.8	0.8
6000	6000	6000	6000	6000	6000
III/3	III/3	III/3	III/3	III/3	III/3
690	690	690	690	690	690
660	690	690	690	690	690
320	400	500	650	800	950
256	320	400	520	640	760
1,000,000	900,000	900,000	900,000	900,000	900,000
100,000					
0.85-1.1	0.85-1.1	0.85-1.1	0.85-1.1	0.85-1.1	0.85-1.1
80	190	190	190	300	300
8.1	20	20	20	26	26
2.4	4	4	4	6	6
85	220	220	220	350	350
8.5	21	21	21	34	34
2.6	6	6	6	9	9
80	200	200	200	300	300
8.1	20	20	20	26	26
2.5	5	5	5	8	8
12	65	65	65	90	90
3	4	4	4	5	5

# 2.3

## Contactors XTCG Technical data

### Auxiliary contact

			XTCGXFAC..	XTCGXSAE11
Rated impulse withstand voltage	$U_{imp}$	VAC	6000	6000
Overvoltage category/degree of pollution			III/3	III/3
Rated insulation voltage	$U_i$	VAC	690	690
Rated operational voltage	$U_e$	VAC	660	690
Rated operational current				
<b>AC-15</b>				
120V	$I_e$	A	6	6
240V	$I_e$	A	4	4
380V	$I_e$	A	1.9	1.9
<b>DC-13</b>				
125V	$I_e$	A	0.55	0.55
250V	$I_e$	A	0.27	0.27
Conventional thermal current	$I_{th}$	A	10	10
<b>Electrical lifespan</b>				
at $U_e=230V$ , AC-15, 3A	Operations	$\times 10^6$	1	1

### Terminals

#### 7-12A

	mm <sup>2</sup>	mm <sup>2</sup>	Nm	Aux Contact mm <sup>2</sup>	Nm
	0.75 - 2.5	0.75 - 2.5	0.8	0.75 - 2.5	0.8
	0.75 - 2.5	0.75 - 2.5			

#### 18-38A

	mm <sup>2</sup>	mm <sup>2</sup>	Nm	Aux Contact mm <sup>2</sup>	Nm
	1 - 6 (1 - 10)*	1 - 6 (1 - 10)*	2	0.75 - 2.5	0.8
	1 - 4 (1 - 10)*	1 - 4 (1 - 10)*			


#### 40-65A

	mm <sup>2</sup>	mm <sup>2</sup>	Nm	Aux Contact mm <sup>2</sup>	Nm
	2.5 - 25	2.5 - 16	2.5	0.75 - 2.5	1.2
	2.5 - 25	2.5 - 16			

#### 80-95A


	mm <sup>2</sup>	mm <sup>2</sup>	Nm	Aux Contact mm <sup>2</sup>	Nm
	6 - 50	6 - 25	6	0.75 - 2.5	1.2
	6 - 50	6 - 25			

\* Only for XTCG032...




### Coil surge suppressor (7-38A)

Coil voltage	RC	Varistor
24-48V	<b>XTCGXRSCN2</b> 167946	<b>XTCGXVSCN2</b> 167949
110-220V	<b>XTCGXRSCDV</b> 167947	<b>XTCGXVSCDV</b> 167950
380-440V	<b>XTCGXRSCCM</b> 167948	<b>XTCGXVSCCM</b> 167951




### Coil surge suppressor (40-95A)

Coil voltage	RC	Varistor
24V	<b>XTCGXRSEB5</b> 174132	<b>XTCGXVSEB5</b> 177204
36V	<b>XTCGXRSEDS</b> 174133	<b>XTCGXVSEDS</b> 177239
48V	<b>XTCGXRSEC5</b> 174134	<b>XTCGXVSEC5</b> 177201
110V	<b>XTCGXRSEE5</b> 174129	<b>XTCGXVSEE5</b> 177203
220V	<b>XTCGXRSEDT</b> 174135	<b>XTCGXVSEDT</b> 174142
380V	<b>XTCGXRSEDU</b> 174136	<b>XTCGXVSEDU</b> 174143



### Mechanical interlock

7-12A	18-38A	40-65A	80-95A
<b>XTCGXMLB</b> 167944	<b>XTCGXMLC</b> 167945	<b>XTCGXMLD</b> 172261	<b>XTCGXMLE</b> 172262



### Din rail plate

80-95A
<b>XTCGXMPPE</b> 172908



## Thermal overload relays XTOD/XTOG



<b>3.1 System overview</b>	Thermal overload relays XTOD/XTOG .....	13
<b>3.2 Product selection</b>	Thermal overload relays XTOD/XTOG .....	14
<b>3.3 Technical data</b>	Thermal overload relays XTOD/XTOG .....	16

## Thermal overload relays XTOD/XTOG

### Product description

XTOD/XTOG thermal overload relays offer precision motor protection with phase loss protection and ambient temperature compensation. The separate mount design allows for flexibility and the units can be mounted on DIN rail or directly on the panel adjacent to the motor contactor.

XTOD... is for separate mounting; XTOG is for direct mounting.

### Features

- Precision motor protection up to 97A
- Integral 1NO/1NC contact for contactor control and alarm signal
- Phase loss protection
- Ambient temperature compensation
- DIN rail or panel mount options

### System overview

Thermal overload relays provide protective features for 1 or 3 phase motors. The relay monitors the operating current of the motor and switches the contactor off in the event of an overload situation. It also protects the motor from damage during phase loss.

### Standards and certifications

- GB 14048
- IEC/EN 60947
- CCC
- CE

# 3.2

## Thermal overload relays XTOD/XTOG

### Product selection

#### Thermal overload relays












3

#### XTOD..CC1S



For use with		Setting range of overload releases $I_r$ (A)	Circuit symbol	Auxiliary contact	Part no. Article no.	Standard package
				N/O =Normally open N/C =Normally closed		
XTCG007	Seperate mounting	0.3-0.45		1 N/O 1 N/C	<b>XTODP45CC1S</b> 167952	1 piece
XTCG009	Seperate mounting	0.45-0.67		1 N/O 1 N/C	<b>XTODP67CC1S</b> 167953	1 piece
XTCG012						
XTCG018	Seperate mounting	0.67-1.0		1 N/O 1 N/C	<b>XTOD001CC1S</b> 167954	1 piece
XTCG025	Seperate mounting	1.0-1.5		1 N/O 1 N/C	<b>XTOD1P5CC1S</b> 167955	1 piece
XTCG032						
XTCG038	Seperate mounting	1.4-2.1		1 N/O 1 N/C	<b>XTOD2P2CC1S</b> 167956	1 piece
	Seperate mounting	1.8-2.7		1 N/O 1 N/C	<b>XTOD2P7CC1S</b> 167957	1 piece
	Seperate mounting	2.4-3.6		1 N/O 1 N/C	<b>XTOD3P6CC1S</b> 167958	1 piece
	Seperate mounting	3.5-5.0		1 N/O 1 N/C	<b>XTOD005CC1S</b> 167959	1 piece
	Seperate mounting	4.0-6.0		1 N/O 1 N/C	<b>XTOD006CC1S</b> 167960	1 piece
	Seperate mounting	5.5-8.5		1 N/O 1 N/C	<b>XTOD8P5CC1S</b> 167961	1 piece
	Seperate mounting	8.5-12.5		1 N/O 1 N/C	<b>XTOD013CC1S</b> 167962	1 piece
	Seperate mounting	12.5-18		1 N/O 1 N/C	<b>XTOD018CC1S</b> 167963	1 piece
	Seperate mounting	17-24		1 N/O 1 N/C	<b>XTOD024CC1S</b> 167964	1 piece
	Seperate mounting	22-30		1 N/O 1 N/C	<b>XTOD030CC1S</b> 167965	1 piece
<b>XTOG...</b>						
XTCG007	Direct mounting	0.1-0.16		1 N/O 1 N/C	<b>XTOGP16BC1</b> 173679	1 piece
XTCG009	Direct mounting	0.16-0.24		1 N/O 1 N/C	<b>XTOGP24BC1</b> 173680	1 piece
XTCG012						
XTCG018	Direct mounting	0.24-0.4		1 N/O 1 N/C	<b>XTOGP40BC1</b> 173681	1 piece
XTCG025	Direct mounting	0.4-0.6		1 N/O 1 N/C	<b>XTOGP60BC1</b> 173682	1 piece
XTCG032						
XTCG038	Direct mounting	0.6-1		1 N/O 1 N/C	<b>XTOG001BC1</b> 173683	1 piece
	Direct mounting	1-1.6		1 N/O 1 N/C	<b>XTOG1P6BC1</b> 173684	1 piece
	Direct mounting	1.6-2.4		1 N/O 1 N/C	<b>XTOG2P4BC1</b> 173685	1 piece
	Direct mounting	2.4-4		1 N/O 1 N/C	<b>XTOG004BC1</b> 173686	1 piece
	Direct mounting	4-6		1 N/O 1 N/C	<b>XTOG006BC1</b> 173687	1 piece
	Direct mounting	6-10		1 N/O 1 N/C	<b>XTOG010BC1</b> 173688	1 piece
	Direct mounting	9-12		1 N/O 1 N/C	<b>XTOG012BC1</b> 173689	1 piece
	Direct mounting	12-16		1 N/O 1 N/C	<b>XTOG016CC1</b> 173690	1 piece
	Direct mounting	16-24		1 N/O 1 N/C	<b>XTOG024CC1</b> 173691	1 piece
	Direct mounting	24-32		1 N/O 1 N/C	<b>XTOG032CC1</b> 173692	1 piece

## Thermal overload relays

For use with		Setting range of overload releases $I_r$ (A)	Circuit symbol	Auxiliary contact		Part no. Article no.	Standard package	
				N/O = Normally open N/C = Normally closed				
<b>XTOG...</b> 	XTCG040	Direct mounting	17~25		1 N/O	1 N/C	<b>XTOD025DC1</b> 173693	1 piece
	XTCG050	Direct mounting	23~32		1 N/O	1 N/C	<b>XTOD032DC1</b> 173694	1 piece
	XTCG065							
	XTCG080	Direct mounting	30~40		1 N/O	1 N/C	<b>XTOD040DC1</b> 173695	1 piece
	XTCG095							
	Direct mounting	37~50		1 N/O	1 N/C	<b>XTOD050DC1</b> 173696	1 piece	
	Direct mounting	48~65		1 N/O	1 N/C	<b>XTOD065DC1</b> 173697	1 piece	
	Direct mounting	37~50		1 N/O	1 N/C	<b>XTOD050EC1</b> 173698	1 piece	
	Direct mounting	48~65		1 N/O	1 N/C	<b>XTOD065EC1</b> 173699	1 piece	
	Direct mounting	63~80		1 N/O	1 N/C	<b>XTOD080EC1</b> 173700	1 piece	
Direct mounting	77~97		1 N/O	1 N/C	<b>XTOD097EC1</b> 173701	1 piece		

# 3.3 Thermal overload relays XTOD/XTOG

Technical data

## General

### XTOD/XTOG

Standards	IEC/EN 60947, GB 14048		
Climatic Proofing	Damp heat, constant, to IEC60068-2-78 Damp heat, cyclic, to IEC60068-2-30		

## Ambient temperature

Open	°C	-25-55	
Enclosed	°C	-25-40	
Temperature compensation	°C	-5-40	
Weight	kg	0.15	
Protection type	IP20		

## Main contacts

### XTOD/XTOG

Rated impulse withstand voltage	$U_{imp}$	VAC	6000
Overvoltage category/pollution degree	III/3		

## Rated insulation voltage

AC	$U_i$	VAC	690
Rated operational voltage	$U_e$	VAC	690
Overload release setting range	A		0.1-97

## Terminal capacity

Solid	mm <sup>2</sup>	1 x (1-6) 2 x (1-6)	
Flexible with ferrule	mm <sup>2</sup>	1 x (1-6) 2 x (1-6)	
Solid/stranded	AWG		
Terminal screw	M4		
Tightening torque	Nm	1.2	

## Auxiliary and control circuits

### XTOD/XTOG

Rated impulse withstand voltage	$U_{imp}$	V	6000
Overvoltage category/pollution degree	III/3		

## Terminal capacity

Solid	mm <sup>2</sup>	1 x (1-6) 2 x (1-6)	
Flexible with ferrule	mm <sup>2</sup>	1 x (1-6) 2 x (1-6)	
Solid/stranded	AWG		
Terminal screw	M3.5		
Tightening torque	Nm	0.8	

Rated insulation voltage	$U_i$	VAC	690
Rated operational voltage	$U_e$	VAC	690
Conventional thermal current	$I_{th}$	A	10
Rated operational current			

## AC-15


120V	$I_e$	A	6
220/240V	$I_e$	A	3
380V	$I_e$	A	1.9
480V	$I_e$	A	1.5
500V	$I_e$	A	1.4
600V	$I_e$	A	1.2

## DC-13


125V	$I_e$	A	0.55
250V	$I_e$	A	0.27

**Contactors**


**7-12A Frame**

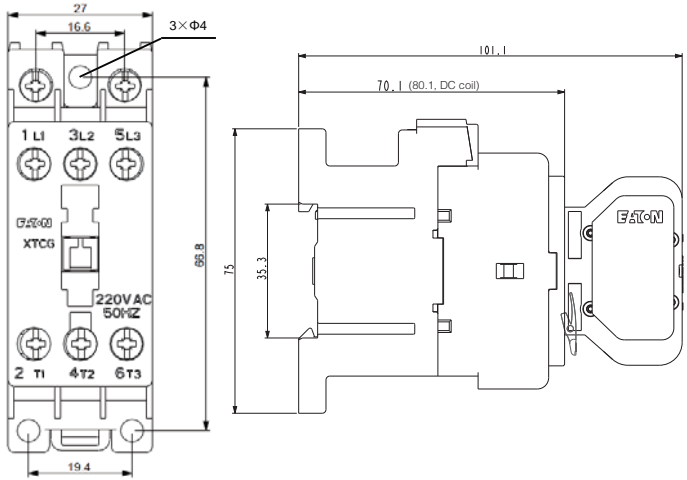


**18-38A Frame**

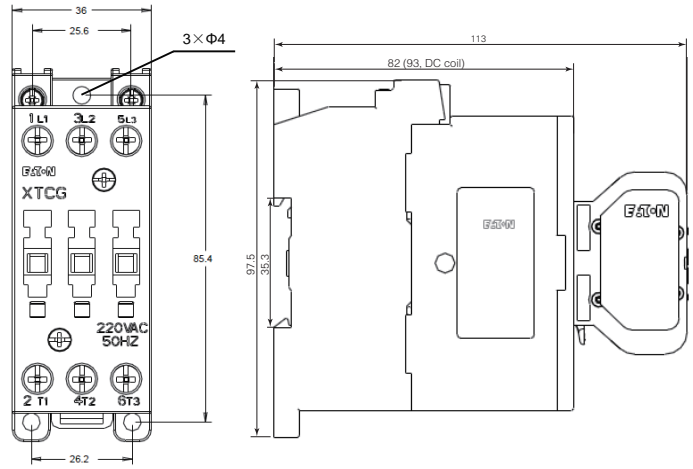

**40-65A Frame**

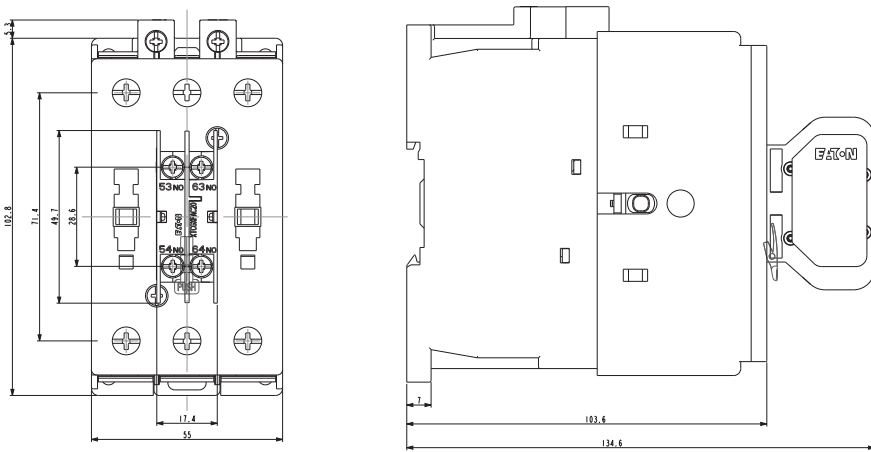

**80-95A Frame**

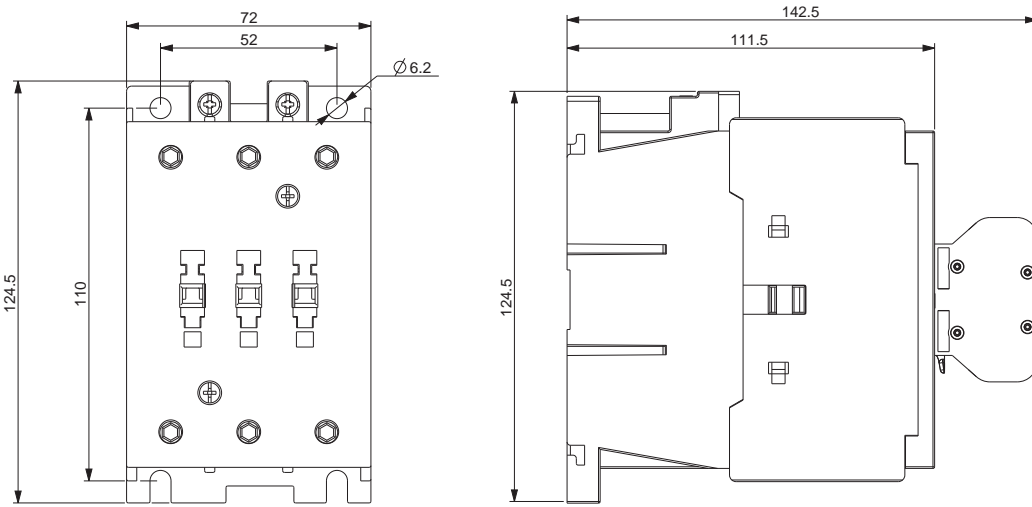


# 4.1

## Dimensions

Thermal overload relay XTOD/XTOG


### Thermal overload relay + mounting adapter

XTOD..CC1S

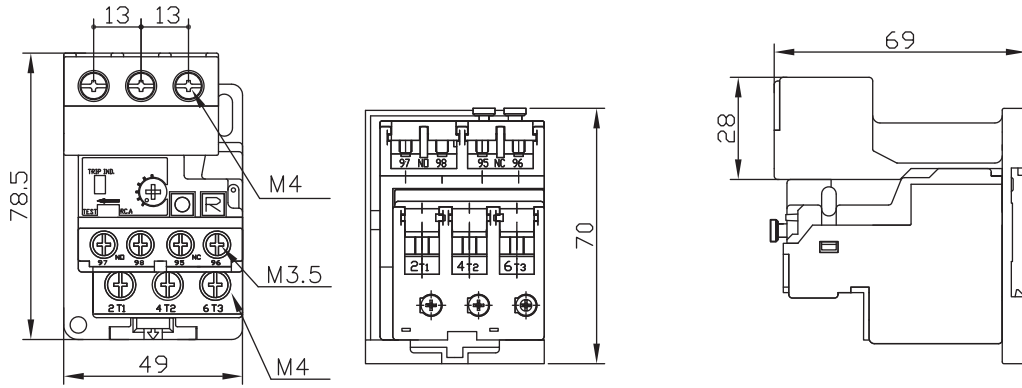


### Thermal overload relays XTOG


7-12A

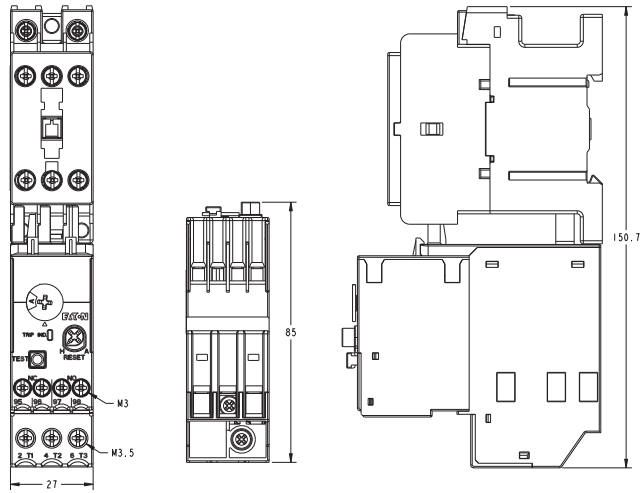


18-38A

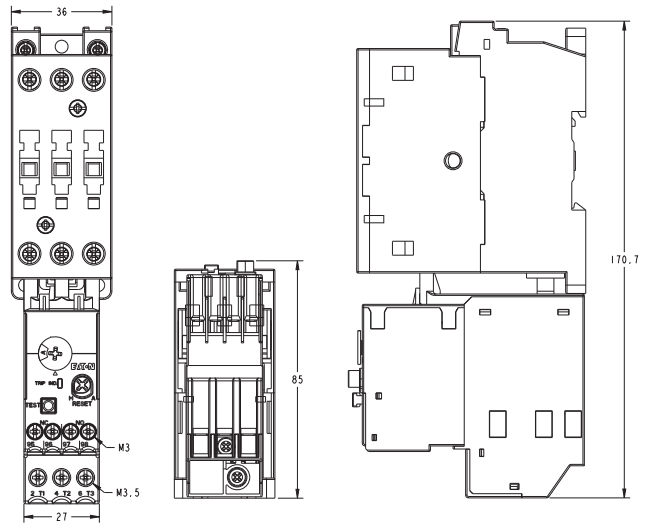

17-65A

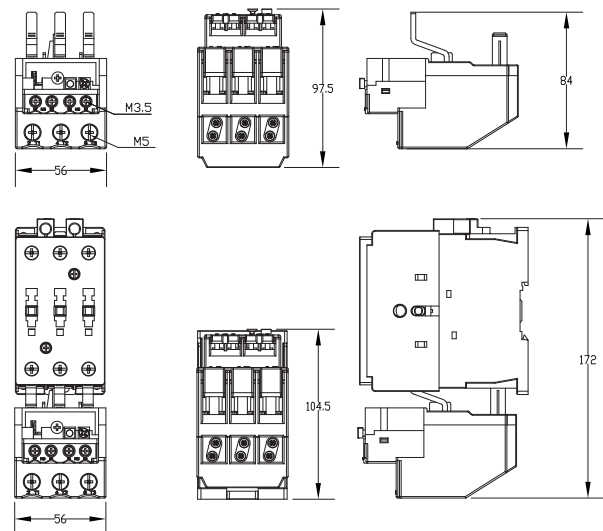


37-97A

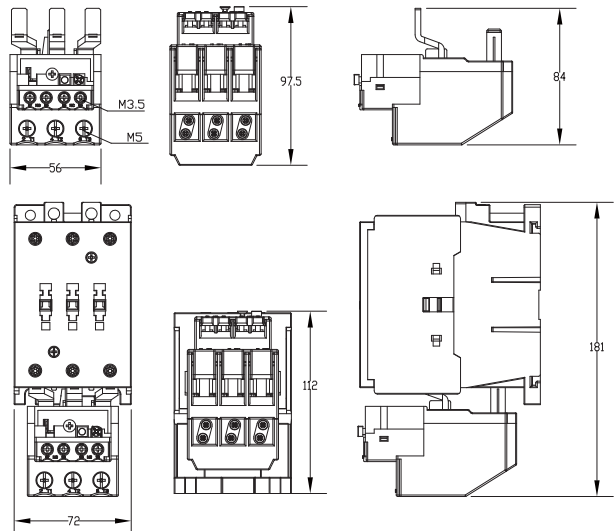


Auxiliary contact module


1 Pole

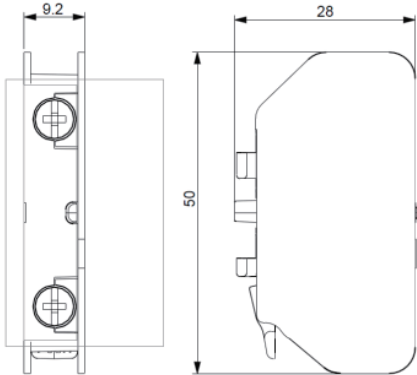

2 Pole

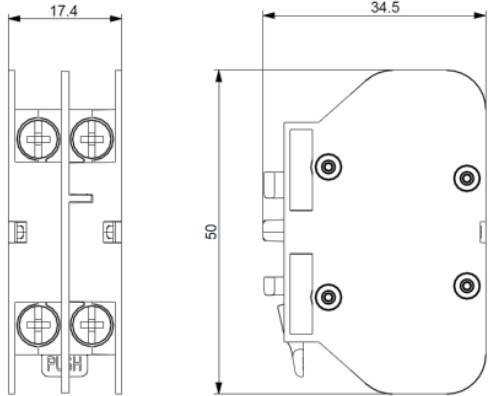


Side mounting contact module

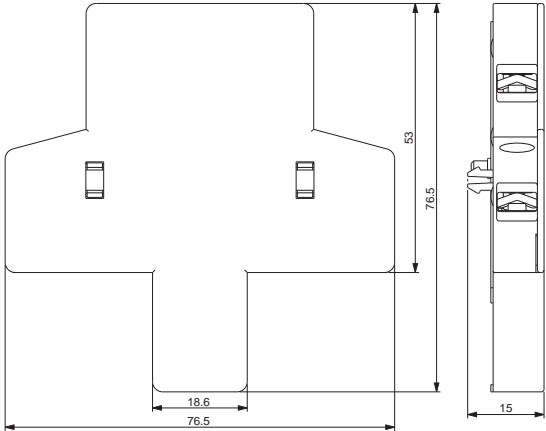

# 4.1 Dimensions


Control relay XTRG / Surge suppressor

## Control Relay

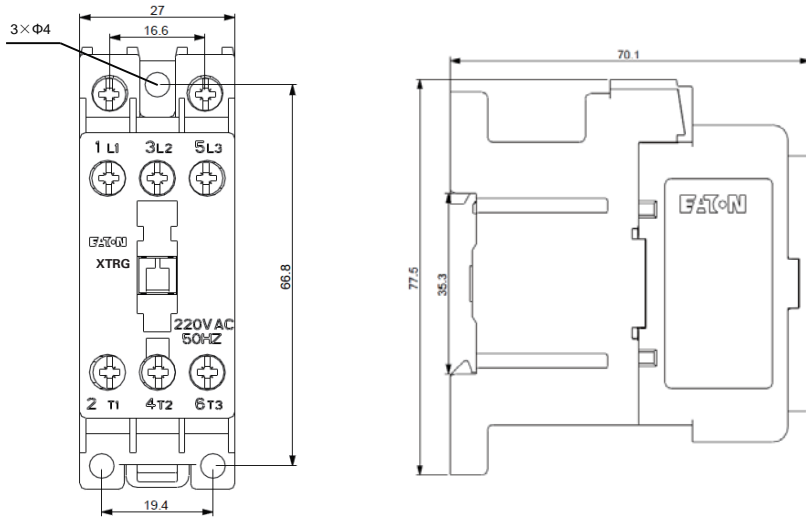


## Surge suppressor

### 7-38A Surge suppressor

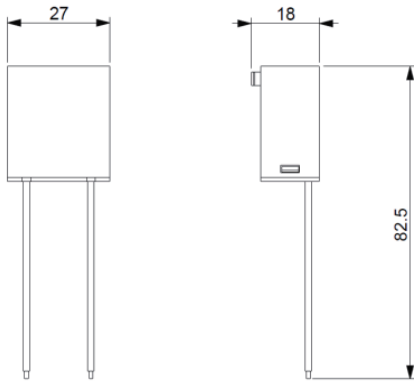


### 40-95A Surge suppressor

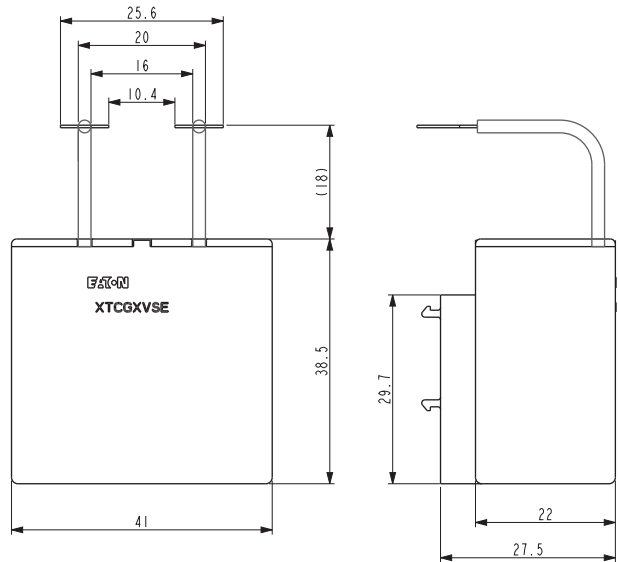




**Mechanical interlock**

**7-12A Frame**

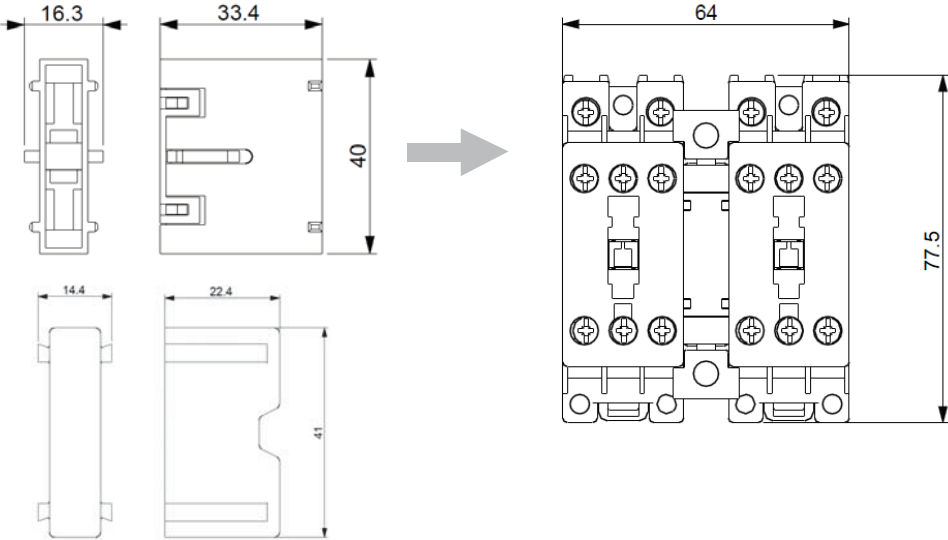

**18-38A Frame**

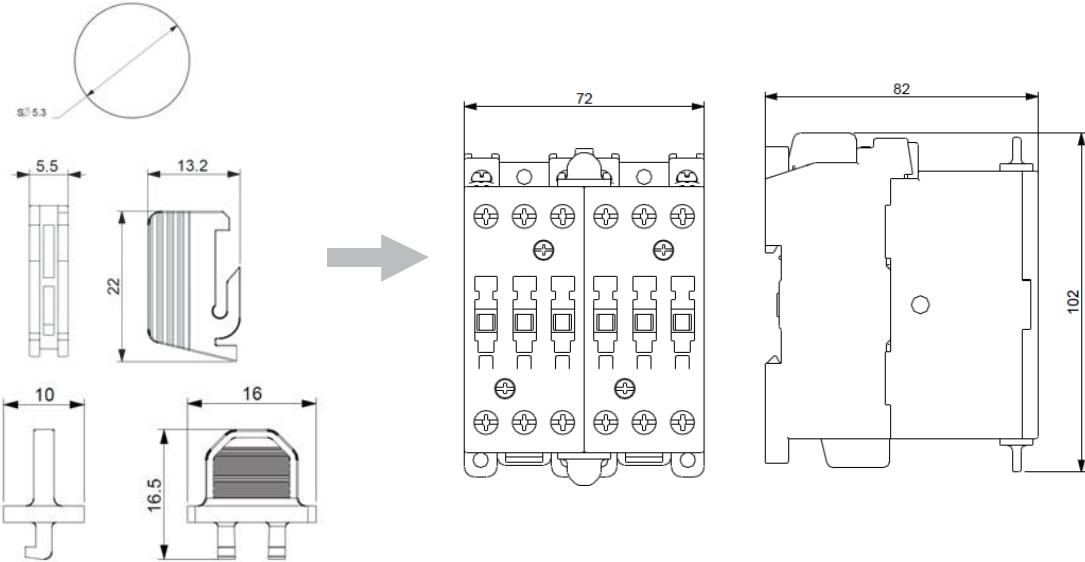


# 4.1 Dimensions


## Mechanical interlock

### Mechanical interlock

#### 40-65A Frame

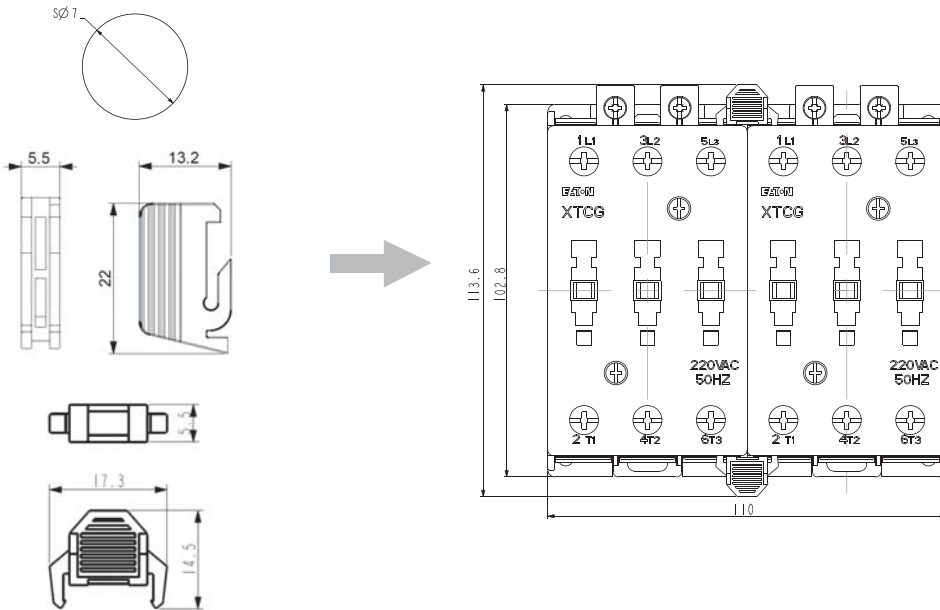

#### 80-95A Frame

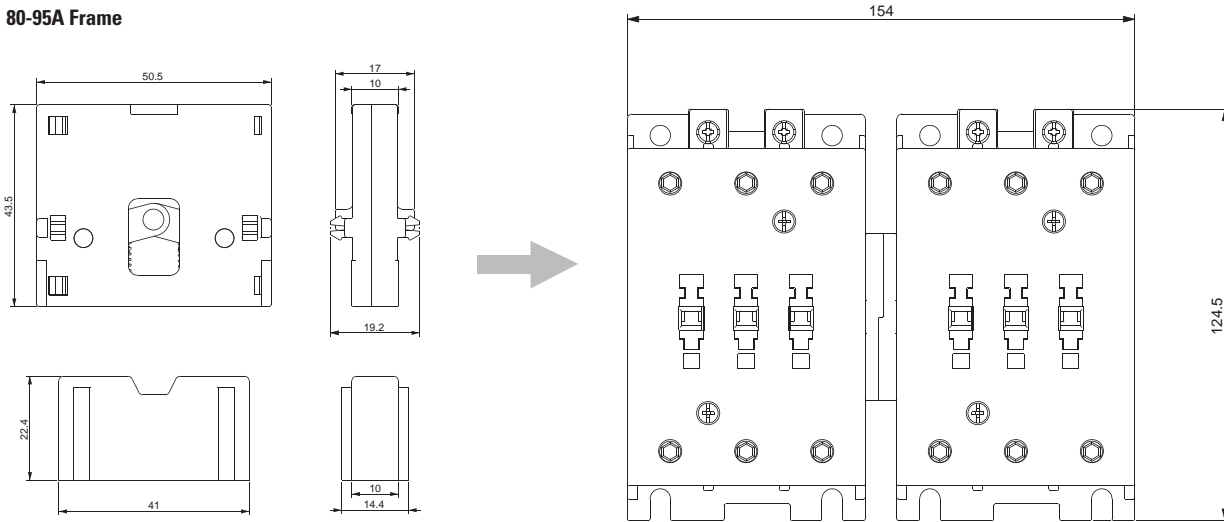

Eaton is a power management company with 2013 sales of \$22.0 billion. Eaton provides energy-efficient solutions that help our customers effectively manage electrical, hydraulic and mechanical power more efficiently, safely and sustainably. Eaton has approximately 100,000 employees and sells products to customers in more than 175 countries. For more information, visit [www.eaton.com](http://www.eaton.com).

Distribution partner



1300 36 26 26

[sales@colterlec.com.au](mailto:sales@colterlec.com.au)

[www.colterlec.com.au](http://www.colterlec.com.au)

**Electrical Sector Asia Pacific**

No.3, Lane 280, Linhong Road,  
Changning District, Shanghai

© 2014 Eaton Corporation  
All Rights Reserved  
Printed in China  
Publication No. ENCA0103016  
June 2014

Eaton is a registered trademark  
of Eaton Corporation.

All other trademarks are property  
of their respective owners.



*Powering Business Worldwide*