



**MADE IN UK**

## TE'S CROMPTON INSTRUMENTS INTEGRA 1221 DIGITAL METERING SYSTEM

### FEATURES

- DIN 96 enclosure
- Backlit LCD screen
- Voltage IN-OUT connections
- CT current measurement 5A/1A
- Plug and socket connections
- Programmable VT, CT ratios
- Modbus™ RTU
- Individual harmonics to 63rd
- Non-volatile memory 1MB

### APPLICATIONS

- Commercial Buildings Disclosures
- Nabers
- National Construction Code (NCC)
- Greenstar Energy Management

### APPROVALS

- IEC BS EN 61010-1:2010
- BS EN 61326-1:2013
- IEC 62053-21 Class 1
- IEC 62053-24 Class 1

The Crompton Instruments Integra 1221 digital metering system (dms) from TE Connectivity enables cost effective solution for the measurement and display of all electrical parameters including total harmonic distortion (THD) and individual, up to the 63rd harmonic.

### DISPLAY

High definition screen features programmable backlight for high contrast visibility in low light and direct sunlight applications. The light can be programmed to automatically dim after set period of time for energy saving.

New “petal” array icons shows the percentage of full scale power of the measured system and the instantaneous power factor (PF) measurement gives clear PF indication. Total power consumption is displayed on the screen at all time.

### Q2C WIRING SOLUTION

Integra 1221 dms and the 3-in-1 current transformers include RJ12 plugs and sockets for easy connectivity and installation and the solution is available with wired looms to reduce assembly time and connection errors. IN-OUT voltage connections reduce wiring and installation time.


### COMMUNICATION

Modbus RTU (RS485) available on all models. Two pulsed outputs available on self powered only.

### ENCLOSURE AND SYSTEM

The DIN 96 panel mounted enclosure includes integral panel mounting clips for quick and easy fitting and to suit user requirements, the range includes single-phase, three-phase three-wire and three-phase four-wire capability, all selectable at the point of installation.


## DIMENSIONS

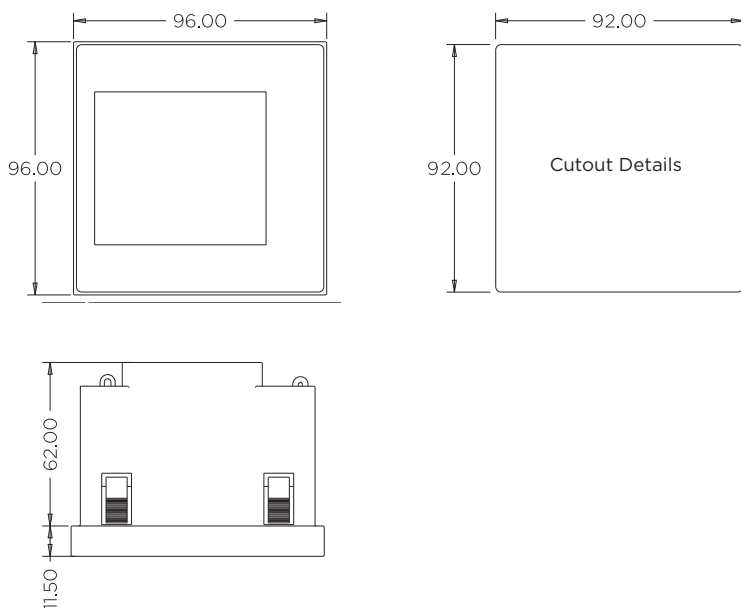


## DISPLAYED PARAMETERS

- Voltage per phase L-N, L-L
- Current per phase and Max Demand
- Power Factor – per phase and system
- Total Harmonic Distortion – Voltage and Current per phase
- Neutral current
- Frequency system
- Phase Sequence
- Active Power (P) per phase, total and Max Demand
- Reactive Power (Q) per phase, total and Max Demand
- Apparent Power (S) per phase, total and Max Demand
- Energy – Active and Reactive Importing and Total
- Energy – Active and Reactive Exporting and Total


## AUXILIARY AND SELF POWERED WIRING DIAGRAMS

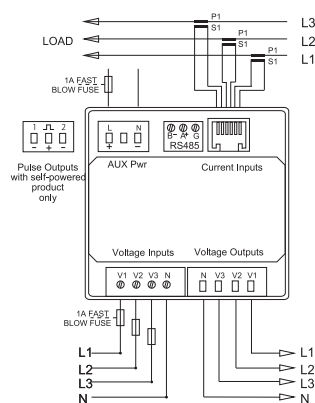

3-phase 4-wire

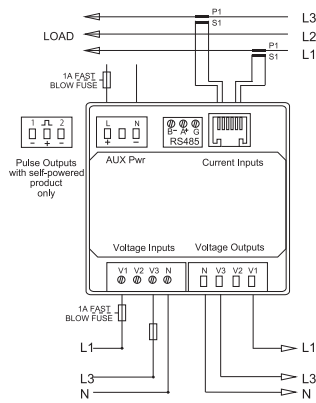



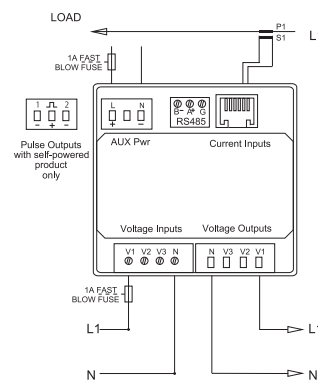


3-phase 3-wire



1-phase 2-wire

| PRODUCT CODES  |                |
|--|----------------|
| Description  | Part number    |
| INTEGRA 1221 multifunction panel meter<br>LCD Display. Input 480 V L-L<br>2 pulsed outputs, Modbus RS485<br>Self powered | INT-1221-S-010 |
| INTEGRA 1221 multifunction panel meter<br>LCD Display Input 480 V L-L<br>Modbus RS485<br>Auxiliary powered               | INT-1221-M-010 |

| SPECIFICATIONS                         |   |
|--|---|
| <b>Input</b>                           |   |
| Nominal input voltage                  | 57.7 – 276 V AC L-N (100-480 V L-L)<br>576 V L-L MAX                          |
| Max. continuous input overload voltage | 120% of nominal   |
| Max. short duration input voltage      | 2 x nominal voltage for 1 second  |
| Nominal input voltage burden           | < 0.2 VA per phase  |
| Nominal input current                  | 100 mA  |
| Nom. Input current burden              | < 0.1 VA  |
| Max. continuous input overload current | 120% of nominal   |
| Max. short duration input current      | 20 x nominal current for 1 second   |
| <b>Auxiliary Powered</b>               |   |
| Operating range                        | 57.7-276 V L-N (100-480 L-L) AC/DC<br>50/60 Hz or Self powered from any phase |
| Supply burden                          | <5 VA   |
| <b>Accuracy</b>                        |   |
| Voltage (V)                            | +/- 0.5% of range maximum   |
| Current (A)                            | +/- 0.5% of range maximum   |
| Frequency (Hz)                         | +/- 0.2% of mid-frequency   |
| Power factor (PF)                      | +/- 1% of unity (0.01)  |
| Active power (W)                       | +/- 0.5% of reading   |
| Reactive power (VAr)                   | +/- 0.5% of reading   |
| Apparent power (VA)                    | +/- 0.5% of reading   |
| Active energy (kWh)                    | +/- 0.5% of reading to IEC 62053-21   |
| Reactive energy (kVArh)                | +/- 0.5% of reading to IEC 62053-24   |
| THD                                    | 2% to 63rd harmonic   |
| <b>Measured Range</b>                  |   |
| Voltage (V)                            | 5 – 120% of nominal (Min 100 V – self powered)                                |
| Current (A)                            | 5 – 120% of nominal   |
| Frequency (Hz)                         | 44 – 66 Hz  |
| Power (W, VAr, VA)                     | 5 – 144% of nominal (bi-directional)  |
| Energy                                 | 8 digit, upto 9999999.9 MWh   |
| Power factor                           | 4 quadrant  |
| THD                                    | 0 – 40% upto 63rd harmonic  |
| <b>Environment</b>                     |   |
| Operating temperature                  | -25°C to +70°C  |
| Storage temperature                    | -40°C to +80°C  |
| Relative humidity                      | 0 to 95%, non-condensing  |
| Shock                                  | 30 g in 3 planes  |
| Vibration                              | 10 Hz to 50 Hz, IEC 60068-2-6, 2 g  |
| Surge voltage                          | 4 kV (IEC 61000-4-5)  |
| Impulse voltage                        | 6 kV (IEC 60060-1)  |
| Electromagnetic immunity               | 80 MHz - 2 GHz at 10 V/m IEC 61000-4-3  |
| Electrostatic discharge                | 15 kV (IEC 61000-4-2)   |
| Altitude                               | 3000 m  |
| Warm-up                                | 1 minute  |
| <b>Outputs</b>                         |   |
| Pulsed outputs (self powered only)     | Opto-coupled, potential-free SPST-NO contact                                  |
| Contact rating current                 | 50 mA at 230 V AC<br>27 mA at 27 V DC   |
| Contact rating voltage                 | 5-27 V DC   |
| Pulse width                            | 60/100/200 ms   |
| Pulse rate                             | 0.001/0.01 /0.1/1/10/100/1000 kWh/kVArh                                       |
| Pulsed output relay (non-configurable) | 2400IMP/kWh   |
| <b>Communications</b>                  |   |
| Type                                   | Modbus RTU (RS485)  |
| Address                                | 1 to 247  |
| <b>Enclosure</b>                       |   |
| Enclosure style                        | DIN 96 panel mount  |
| Dimensions                             | 96x96x62 mm   |
| Panel cut-out                          | 92x92 mm  |
| Panel thickness                        | 1-5 mm  |
| Protection rating                      | Front IP54, Rear IP30, IP65 (with panel gasket)                               |
| Material                               | UL 94-VO  |
| Weight                                 | 340 g   |
| Cable size                             | 0.05 mm <sup>2</sup> – 2.5 mm <sup>2</sup> stranded wire                      |
| Terminals                              | Voltage and Current : Shrouded screw clamp                                    |

| PARAMETERS  |     |  |
|---|-----|--|
| Button  | Scr | Parameter  |
|    | 1   | Watts L1<br>Volts L1<br>Current L1<br>Active Energy L1   |
|   | 2   | Watts L2<br>Volts L2<br>Current L2<br>Active Energy L2   |
|   | 3   | Watts L3<br>Volts L3<br>Current L3<br>Active Energy L3   |
|   | 4   | Watts L1<br>Volts L1<br>Current L1<br>Reactive Energy L1 |
|   | 5   | Watts L2<br>Volts L2<br>Current L2<br>Reactive Energy L2 |
|   | 6   | Watts L3<br>Volts L3<br>Current L3<br>Reactive Energy L3 |
|  | 1   | L-N Volts L1, L2, L3                                     |
|   | 2   | L-L Volts L1, L2, L3                                     |
|   | 3   | Current L1, L2, L3, N                                    |
|   | 4   | V-THD% per line  |
|   | 5   | I-THD% per line  |
|   | 6   | Phase Sequence V&I                                       |
|  | 1   | PF and System Freq                                       |
|   | 2   | PF per phase   |
|   | 3   | MD per phase   |
|   | 4   | System Max demand<br>P, Q, S.                            |
|  | 1   | Active Power (P)<br>L1, L2, L3                           |
|   | 2   | Reactive Power (Q)<br>L1, L2, L3                         |
|   | 3   | Apparent Power (S)<br>L1, L2, L3                         |
|   | 4   | System Powers P,Q,S                                      |
|  | 1   | Imp Active Energy<br>Exp Active Energy                   |
|   | 2   | Imp Reactive Energy<br>Exp Reactive Energy               |
|   | 3   | Total Active Energy<br>Total Reactive Energy             |

## 3-IN-1 CURRENT TRANSFORMERS



The 3-in-1 current transformer range are for use with the Integra 1221 digital metering system which combines three traditional current transformers in one moulding case with a RJ12 connection for simple and easy error free installation.

| PRODUCT CODES    | PRIMARY CURRENT | VA AT CLASS 1 | VA AT CLASS 0.5 |
|------------------|-----------------|---------------|-----------------|
| DL3N1-35-60/0.1  | 60A             | 0.25          | -               |
| DL3N1-35-125/0.1 | 125A            | 0.5           | 0.25            |
| DL3N1-35-160/0.1 | 160A            | 0.35          | 0.25            |
| DL3N1-35-250/0.1 | 250A            | 0.5           | 0.25            |
| DL3N1-45-250/0.1 | 250A            | 0.25          | -               |
| DL3N1-45-400/0.1 | 400A            | -             | 0.25            |
| DL3N1-45-600/0.1 | 600A            | -             | 0.25            |
| DL3N1-70-400/0.1 | 400A            | -             | 0.25            |
| DL3N1-70-600/0.1 | 600A            | -             | 0.25            |
| DL3N1-70-800/0.1 | 800A            | -             | 0.25            |

### VOLTAGE METER TO METER LOOM

The meter to meter loom connects the voltage for upto 32 meters using high quality LSZH cable fitted with suitable plugs and socket for safe and easy voltage connections.



| Part Number             | Length  |
|-------------------------|---------|
| Q2C-VMM-0600-01         | 600 mm  |
| Q2C-VMM-0900-01         | 900 mm  |
| Q2C-VMM-1200-01         | 1200 mm |
| Q2C-VMM-1500-01         | 1500 mm |
| Q2C-VMM-2000-01         | 2000 mm |
| Other lengths available |         |

### VOLTAGE METER TO OPEN LOOM

The meter to open loom connects the voltage supply from the fused connections to the meter using high quality LSZH cable fitted with suitable plugs and socket for safe and easy voltage connections.



| Part Number             | Length  |
|-------------------------|---------|
| Q2C-VFO-0600-01         | 600 mm  |
| Q2C-VFO-1000-01         | 900 mm  |
| Q2C-VFO-1200-01         | 1200 mm |
| Q2C-VFO-1500-01         | 1500 mm |
| Other lengths available |         |

Official Distribution Partner

**Colterlec**

Phone 1300 36 26 26

sales@colterlec.com.au | www.colterlec.com.au

© 2017 TE Connectivity Ltd. family of companies. All Rights Reserved.  
 EPP-2881-03/19.

TE, TE Connectivity, the TE connectivity (logo) and Integra are trademarks of the TE Connectivity Ltd. family of companies. Crompton Instruments is a trademark of Crompton Parkinson and is used under a licence. Other logos, product and company names mentioned herein may be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this brochure are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

