# **AN100S - 100 Amp Covered Links - Small**





- Brass rated to 100 Amps
- All plastics used are 960° Glow Wire Compliant
- All plastics are UL94-VO Rated
- **ROHS Compliant**

- Available less cover
- Bar only available
- Available with black, red or clear covers
- All bars on clear bases
- Made to AS/NZS5112-2015



Dovt				Max. Copper Cable Size / Quantity of Tunnels				
Part	Neutral Black	Active Red	Universal Clear	16mm²	25mm²	35mm²	Front Wired	Back Wired
AN100S-4HBW-B, R or C	✓	✓	$\checkmark$		4 x			*
AN100S-5- B , R or C	✓	✓	✓	5 x			*	
AN100S-535- B, R or C	✓	✓	✓	2 x		3 x	*	
AN100S-6- B , R or C	✓	✓	✓	6 x			*	
AN100S-635- B , R or C	$\checkmark$	✓	$\checkmark$	5 x		1 x	*	
AN100S-635X2- B, R or C	✓	✓	✓	4 x		2 x	*	
AN100S-7- B , R or C	$\checkmark$	✓	$\checkmark$	7 x			*	
AN100S-735- B, R or C	✓	✓	✓	6 x		1 x	*	
AN100S-7BW- B , R or C	✓	✓	✓	4 x 2 x		1 x	*	*











## AN100M - 100 Amp Covered Links - Medium





- Brass rated to 100 Amps
- All plastics used are 960° Glow Wire Compliant
- All plastics are UL94-VO rated
- **ROHS** compliant

- Available less cover
- Bar only available
- Available with black, red or clear covers
- All bars on clear bases
- Made to AS/NZS5112-2015



Dout	Cover Colour				Front	Back			
Part	Neutral Black	Active Red	Universal Clear	10mm²	16mm²	25mm²	35mm²	Wired	Wired
AN100M-6HBW-B, R or C	✓	✓	✓			6 x			*
AN100M-10- B , R or C	✓	✓	✓		10 x			*	
AN100M-1035- B, R or C	✓	✓	✓		7 x		3 x	*	
AN100M-1335- B, R or C	✓	✓	✓		11 x		2 x	*	
AN100M-18- B , R or C	✓	✓	✓	12 x (Compact tunnels)	4 x	2 x		*	











# AN140T - 140 Amp Links





- Brass rated to 140 Amps
- All plastics used are 960° glow wire compliant
- All plastics are UL94-VO rated
- ROHS compliant

- Available less cover
- Bar only available
- Available with black, red or clear covers
- All bars on clear bases
- Made to AS/NZS5112-2015



<b>.</b> .		Cover Colou	r	Max. Copper Cable Size / Quantity of Tunnels	
Part	Neutral Black	Active Red	Universal Clear	35mm²	Front Wired
AN140-4T35- B , R or C	✓	✓	✓	4	*











# AN165 - 165 Amp Covered Links





- Brass section rated to 165 Amps
- All plastics used are 960° glow wire compliant
- All plastics are UL94-VO rated
- ROHS compliant

- Bar only available
- Available with black, red or clear cover and base
- Cover and base are same footprint as AN350 Series
- Made to AS/NZS5112-2015



Dort	Cover Colour			Max. Copper Cable Size / Quantity of Tunnels						Back
Part	Neutral Black	Active Red	Universal Clear	10mm²	16mm²	25mm²	35mm²	70mm²	Wired	Wired
AN165-7- B , R or C	✓	✓	✓		2 x	2 x	1 x	2 x	*	
AN165-7BW- B, R or C	✓	✓	✓		2 x	2 x	1 x	2 x		*
AN165-13- B , R or C	✓	✓	✓	2 x	4 x	4 x	1 x	2 x	*	











## **AN350 - 350 Amp Covered Links**





- Brass section rated to 350 Amps
- All plastics used are 960° glow wire compliant
- All plastics are UL94-VO rated
- ROHS compliant
- Bar only available

- Available with Black, Red or Clear Covers
- Cover and base are same footprint as AN165 Series
- Made to AS/NZS5112-2015



Dord		Cover Colo	ur		Front			
Part	Neutral Black	Active Red	Universal Clear	16mm²	35mm²	50mm²	150mm²	Wired
AN350-4- B , R or C	✓	✓	✓			4 x		*
AN350-7- B , R or C	✓	✓	✓		3 x	2 x	2 x	*
AN350-8- B , R or C	✓	✓	$\checkmark$			6 x	2 x	*
AN350-13- B , R or C	✓	✓	✓	10 x	1 x		2 x	*











## **AN400 Series - 400 Amp Covered Links**





- 500 Amp when all wire tunnels are > 80% filled. 400 Amp in all other cases
- All plastics used are 960° glow wire compliant
- All plastics are UL94-VO rated
- ROHS compliant

- Bar only available
- Available with clear or black cover
- All bars on clear bases
- Made to AS/NZS 5112:2015



Part	Cover Colour	Front Wired							
	Clear	16mm²	35mm²	50mm²	95mm²	150mm²	185mm²	FIGHT WHEA	
AN400-4-150-CLR	✓				2 x	2 x		*	
AN400-7-185-CLR	✓		3 x	2 x			2 x	*	
AN400-13-185-CLR	✓	8 x		3 x			2 x	*	

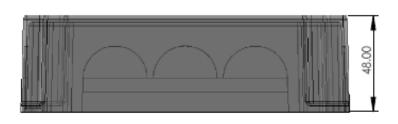

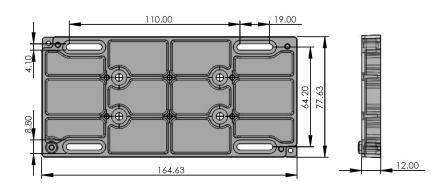







## **ANMPL - 100 Amp Meter Panel Link - Vic SIR**



- All plastics used are 960° glow wire compliant
- All plastics are UL94-VO rated
- **ROHS** compliant
- Made to AS/NZS 5112:2015
- Vic SIR approved



Part	Cover Colour	Мах	Back Wired			
Part	Neutral (Black)	16mm²	25mm²	50mm²	35mm² Clamp Plate	Back Willed
ANMPL-2-B	*	1 x	1 x	2 x	1 x 35mm²	*

