

Suitable for flat cables with width between 26 mm and 40 mm and height between 7 mm and 11 mm


OTHER FEATURES	
Polarity	4P+E
Flexible wiring (minmax.)	6 - 10 mm²
Stranded wiring (minmax.)	6 - 10 mm²
Number of operations	2000 cycles
IP protection plug connected	IP54
IP protection disconnected	IP2X






REFERENCES AND ACCESSORIES

	SOCKET- OUTLET female FC	Contraction	INLET male FC	
500 V AC	4+E	05F4007		05F8007

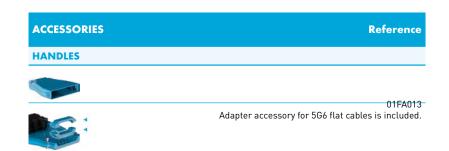



DRAWINGS AND DIMENSIONS

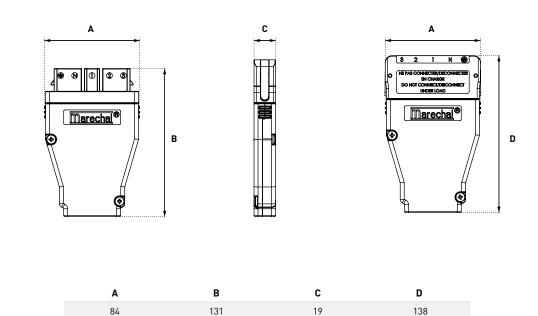



For more information Call 1300 36 26 26 | sales@colterlec.com.au | www.colterlec.com.au